

The RB 4000 booster gives you instant power to start vehicles with dead 12V vehicle batteries up to 45 times, before needing a recharge. Packed with safety features, additional USB charging ports and a built-in flashlight, it's as versatile as it is reliable. Powerful, compact and ready to go, it ensures nothing gets in the way of life's journeys.

JUMP START DEAD 12V BATTERIES


Meet the powerful RB 4000 portable booster. Compact in size, yet packed with 4000A battery peak current, it is built to jump start most 12V batteries with ease. It has advanced safety features, including spark-proof technology and reverse polarity protection, so you can use it confidently to get back on the move. But it's more than just a jump starter. It's also a versatile, long-lasting power bank with USB charging ports for all your devices, and has a built-in LED flashlight with three lighting modes. You'll never miss a moment, no matter where your adventures take you – with the peace of mind that comes from Sweden's charging pioneers, CTEK.

MORE POWER, ALWAYS READY

The RB 4000 delivers instant starting power to jumpstart your vehicle with ease. Whether it's helping you overcome an unexpected dead battery or providing power for devices on the go, it's always ready when you need it. Compact, smart and durable, it's the must-have essential to meet the challenges of every journey.

- Instant starting power for up to 45 starts on a single charge.
- Jump starts all kinds of 12V lead-acid batteries, including AGM, EFB, WET, GEL and Ca/Ca.
- Spark-proof technology & reverse polarity protection for safe use.
- Powerful, yet compact for easy portability and storage.
- High-capacity USB powerbank plus a built-in flashlight with 3 lighting modes.
- Robust Swedish-inspired design for dependable performance.
- Charges phones, tablets and other electronics through built-in USB-A and USB-C ports.
- Comes with clamps, storage bag and user guide.
- Ergonomic design with intuitive LED indicators.
- 2-year warranty.



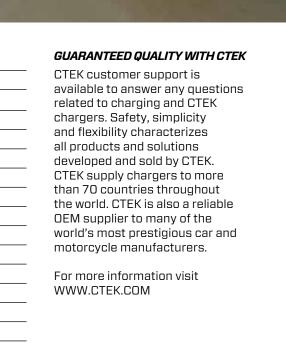



TECHNICAL DATA

BATTERY PEAK CURRENT	4000A / 45 starts
MAXIMUM CRANKING CURRENT	2060A
START CURRENT	Up to 1300A
INTERNAL BATTERY CAPACITY	24000mAh (6000mAhx4 / 88.8Wh)
FAST CHARGING TIME	3.5 hours
INTERNAL BATTERY PACK TYPE	4S1P
INTERNAL BATTERY CELL CHEMISTRY	Polymer Lithium-Ion
INPUT	USB-C PD 30W
ОИТРИТ	12V, USB-A QC3.0, USB-C PD30W
BATTERY TYPES	12 V: WET, MF, Ca/Ca, AGM, EFB, GEL
BATTERY CHEMISTRY	Lead acid
START VOLTAGE	2.5 V
AMBIENT OPERATING TEMPERATURE	-20 °C to +55 °C for output
AMBIENT STORAGE TEMPERATURE	0°C to +55°C
USER INTERFACE	Display
DIMENSIONS (L X W X H)	239 x 107 x 40 mm
NET WEIGHT (UNIT WITH CABLES)	1210+/-10 g
DEGREE OF PROTECTION	IP65
DETACHABLE STARTING CABLE LENGTH OUTPUT	0.25 m
POWER SOURCE	230 V -> 12 V
BATTERY VOLTAGE	12 V
CONNECTIVITY	Removeable
COOLING	Natural convection
MAINS ADAPTER CABLE LENGTH	1 m
MAINS ADAPTER CABLE TYPE	USB-C
WARRANTY	2 years

